





Klo-Shure® Strut Mounted Couplings 9-SERIES NEW SIZES

AVAILABLE NOW



Key Features

- For use with fiberglass insulation
- Classified 2043 (25/50) for use in plenums and air handling systems.
- Superior vapor barrier at suspension points.
- Available for:
5/8" to 5-1/8" O.D. tube;
1/2" to 3" nominal pipe
and; 25mm to 110mm
metric sizes.
- Insulation wall thickness
sizes includes:
1/2" up to 2".

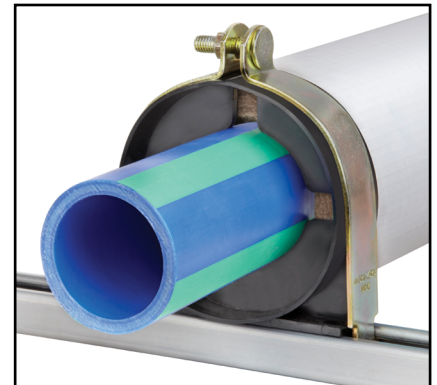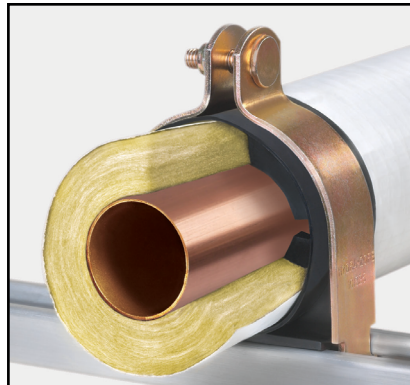

O.D. / Pipe Sizes	
Part No.	Size
1" wall insulaton	
928350	3" pipe (3.50 O.D.)
928362	3-5/8" O.D.
928412	4-1/8" O.D.
928512	5-1/8" O.D.
1-1/2" wall insulaton	
929262	2-5/8" O.D.
929312	3-1/8" O.D.
929350	3" pipe (3.50 O.D.)
929362	3-5/8" O.D.
929412	4-1/8" O.D.
2" wall insulaton	
922212	2-1/8" O.D.
922262	2-5/8" O.D.
922312	3-1/8" O.D.
922362	3-5/8" O.D.

Metric Pipe Sizes	
Part No.	Size
1" wall insulaton	
928M110	110mm
1-1/2" wall insulaton	
929M25	25mm
929M32	32mm
929M40	40mm
929M50	50mm
929M63	63mm
929M75	75mm
929M90	90mm



1751 Summit Drive ■ Auburn Hills, Michigan 48326 ■ (248) 373-5151

Hydra-Zorb.com